




TECHNICAL SPECIFICATIONS				
VOLTS		120		
AMPS		12.5		
WATTS		1500		
HEATER	HIGH	1500 watts		
	LOW	750 watts		
NO HEATER		22 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTOR		1 at 5 watts		
HEIGHT, WIDTH, DEPTH		23 1/2 x 58 5/8 x 6 3/4		
GLASS VIEWING OPENING		11 7/8 x 55 1/4"		
SURROUND SIZE		15 3/4" x 59 1/8"		
SHIPPING SIZE		25 1/2 x 69 3/4 x 9 3/4"		
SHIPPING WEIGHT		124 lbs		
UNIT				
GLASS FRONT		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		76''		
APPROX. HEATING AREA		400 sq ft		



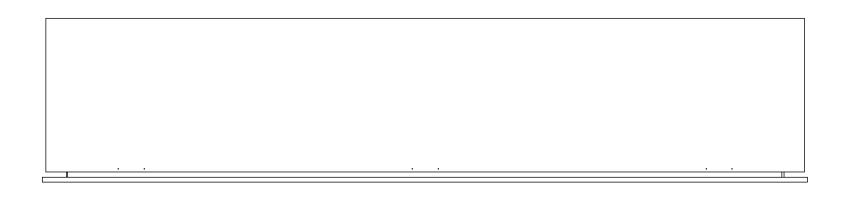

SERIES BUILT IN	MODEL BI-60-SLIM	c∰* <sub>US</sub>	REV 1
SCALE 1" = 1'-0"	DATE: 7/1/2015	SHEET 1 OF 1	

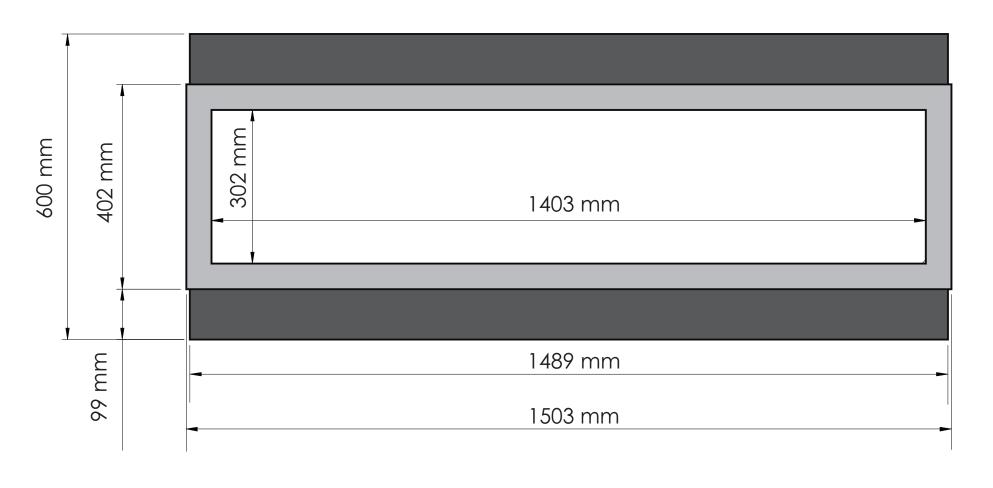



TECHNICAL SPECIFICATIONS				
VOLTS		120		
AMPS		12.5		
WATTS		1500		
HEATER	HIGH	1500 watts		
	LOW	750 watts		
NO HEATER		22 watts		
	QUANTITY	LED		
LAMPS	WATTS			
	TOTAL WATTS	22 watts		
ROTOR MOTOR		1 at 5 watts		
HEIGHT, WIDTH, DEPTH		60 x 148.9 x 17.2 cm		
GLASS VIEWING OPENING		30.2 x 140.3 cm		
SURROUND SIZE		40.2 x 150.3 cm		
SHIPPING SIZE		64 x 176.7 x 24.8 cm		
SHIPPING WEIGHT		56 kg		
UNIT GLASS FRONT				
		Included		
PLUG LOCATION		Left Side		
CORD LENGTH		193 cm		
APPROX. HEATING AREA		37 sqm		





SERIES BUILT IN	MODEL BI-60-SLIM	COP <sub>US</sub>	REV 1
SCALE 1:12	DATE: 7/1/2015	SHEET 1 OF 1	