

## STANDARD FEATURES

## 


- Available in 30", 36", and 42" widths
- Horizon HoodTM with spring-assisted hinges to hold at desired heights\*
- Motion activated Stadium LightsTM with halogen under-hood lighting\*
- Multi-purpose built-in ceramic infrared rotisserie / searing / finishing burner\* from 12,000 to 18,000 Btu/hour (depending on model) with simple touch on function
- Patented high performance 321SS tubular Trellis BurnerTM at 25,000 Btu/hour each
- Patented 5/16" thick stainless steel DiamondCut GratesTM lasered in-house
- High performance variable ceramic infrared sear burner at 25,000 Btu/hour each





Under-Hood Lighting

Symmetrical flip to clean radiant tray with monogrammed ceramic briquettes\*

- 519 square inch total grilling surface for 30" model. 647 square inch total grilling surface for 36" model. 774 square inch total grilling surface for 42" model.
- Warming rack 189 square inches for the 30", 236 square inches for the 36" and 282 square inches for the 42" unit.
- Concealed chain driven whisper quiet rotisserie motor system with a single speed, 6 rpm, 50 in-lbs motor















Split Shelf (42" model only)



- for wood chips or smoker pellets
- · Heavy gauge welded body construction
- · LED front control panel lighting with simple touch on function

• Infinite position monogrammed removable smoker and handle

- Monogrammed temperature gauge with cooking zone markings
- Stainless steel removable drip tray for ease of cleaning
- · Patented Zamak die-cast knobs, burner indicators and bezels
- Porcelain broiling pan with stainless steel rotisserie spit and forks



36" Model Shown

- Natural Gas (NG) or Liquid Propane (LP)
- Twelve (12) Hestan signature color finishes
- · Carbon Fiber Vinyl Cover
- Gas conversion kits (NG/LP)
- · Variable Sear Burner conversion kit
- Trellis BurnerTM conversion kit
- High altitude kit


\* = patented





3-1/2" SQUARE

GAS SUPPLY

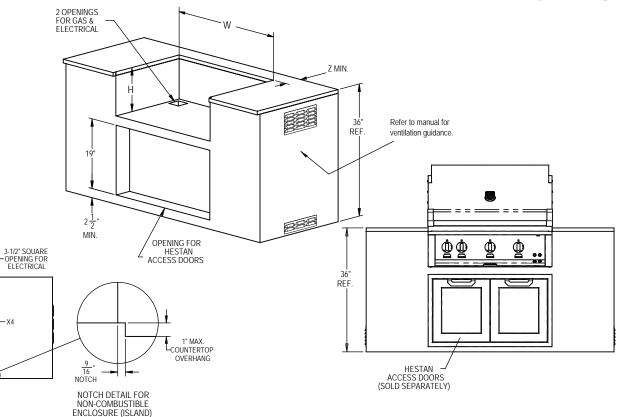

INSULATED JACKETS												
Model Number	Description	W (in.)	D (in.)	H (in.)	X1 (in.)	X2 (in.)	X3 (in.)	X4 (in.)	Z (in.)			
AGIJ30	Insulated Jacket, 30"	35	25-1/8	12-13/16	4-3/16	3 - 1/8	1-1/2	3- <sup>13</sup> /16	3 - 7/8			
AGIJ36	Insulated Jacket, 36"	41	25-1/8	12-13/16	4-3/16	3 - 1/8	1-1/2	3-13/16	3 -7/8			
AGIJ42	Insulated Jacket, 42"	47	25-1/8	12-13/16	4-3/16	3 - 1/8	1-1/2	3- <sup>13</sup> /16	3 -7/8			

Z MIN.

TOP VIEW

GAS REQUIREMENTS: 1/2" NPT gas connection. Minimum gas supply is 7" water column for natural gas and 11" for propane. Operating pressure at the manifold is 4" water column for natural gas and 10" for propane. All units require a regulated gas supply. (included)

## **ELECTRICAL REQUIREMENTS:**

120V, 60Hz, 6 amps



Hestan Outdoor products are approved for outdoor use only. Hestan Commercial Corporation reserves the right to change materials and specifications without notice. Please reference our Installation Instructions for more elaborate detail and as the main source in your dimensional planning. Specify type of gas when ordering.

Built - In	Description	——————————————————————————————————————								Total
Models		W (in.)	D (in.)	H (in.)	X1 (in.)	X2 (in.)	X3 (in.)	X4 (in.)	Z (in.)	Btu's
G_BR <sub>3</sub> o-NG / -LP	30" Grill Built-in	29	23-1/2	11-1/2	1-3/16	1-1/2	1/4	13/16	5 - <sup>1</sup> /2	62000
G_BR <sub>3</sub> 6-NG / -LP	36" Grill Built-in	35	23-1/2	11- <sup>1</sup> / <sub>2</sub>	1-3/16	1-1/2	1/4	13/16	5 - <sup>1</sup> / <sub>2</sub>	89000
G_BR42-NG / -LP	42" Grill Built-in	41	23-1/2	11-1/2	1-3/16	1-1/2	1/4	13/16	5 - <sup>1</sup> / <sub>2</sub>	118000
_= specify burner configuration										



COUNTERTOP

OVERHANG

NOTCH DETAIL FOR

**ENCLOSURE (ISLAND)** 

WITH INSULATION JACKÉT

COMBUSTIBLE



